

## TECHNICAL DATA SHEET

### AMLTAL IP44 / Aga-Led® Type B

VERSION - 13.12.2016


#### STANDARD LUMINAIRE

Reference	AMLTAL
Protection Class	IP44
Lighting Source	Aga-Led® Type B
Connector	Rigid Loop on B'Light conductor 16mm <sup>2</sup>
Dimensions	120 x 60mm
Standard Length	610 - 910 - 1210 - 1510mm
Length on measure	on request up to 2965mm
Nb Lighting Unit	34 LED/m
Voltage	24V
Power	32.64W/m to 40.8 W/m
Connecting Cable	1m standard cable 2x1.5mm <sup>2</sup>
Fixation	FIX
End Caps	ARL + EFA

#### APPLICATION: Miroirs, walls



#### AMLTAL / AGA-LED® TYPE B - Rigid Loop

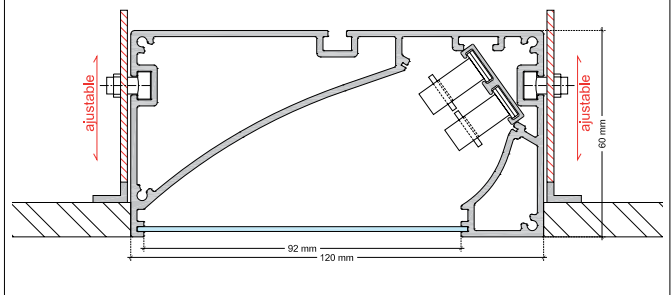

#### FINISH


##### Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome Aspect Polished Aluminium Gold Aspect Plywood

##### Glass Finishing

Standard	VER: Opaline Glass
On request	VERC: Clear Glass

#### FIXATION : FIX



#### ON REQUEST

Connecting Plug	AMS / AF
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

#### ON REQUEST : Connecting plug AMS/AF



#### LIGHTING SOURCE

Lighting Source	Aga-Led® Type B - Generation 2	
Ref	B3	B6
Power	0.96W	1.2W
Voltage	24V	24V
Beam Angle	120°	120°
CRI	80	80
Lifetime	50'000h	
Working T°	-20°C to +45°C	
Environmental protection	Modified acrylate resin	

#### Color Temperature & Luminous Flux / Unit

	2200K	2400K	2700K	3000K	4000K
<b>Aga-Led® B3-G2</b>	--	97 lm	137lm	137lm	137lm
<b>Aga-Led® B6-G2</b>	129 lm	140 lm	166 lm	166 lm	166 lm

#### CERTIFICAT



#### AGABEKOV



**AGABEKOV SA Manufacture** 6, ROUTE DE COMPOIS  
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND  
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08  
E - mail: info@aaabekov.com



**AGABEKOV SA Bureau d'etudes** 6, ROUTE DE COMPOIS  
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND  
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08  
Internet: www.aaabekov.com

