

TECHNICAL DATA SHEET

LED Down Light - Adjustable Beam Angle / EN-DLI030-01, EN-DLI045-01

VERSION - 04.08.2017

STANDARD LUMINAIRE

Reference	EN-DLI030-01	EN-DLI045-01
Dimensions	293 x 158 x Ht.94mm	428 x 158 x Ht.94mm
Cut-Out	250 x 130mm	380 x 130mm
Power	30W	45W
Current	350mA per spot	350mA per spot

Protection Class	IP20
Voltage	AC220-240V
Led Type	Cree Cob Led
CRI	80+ or 90+
Beam Angle	Adjustable 15° to 90°
Dimmable	Yes
Orientable	25° pivot axis & 350° horizontally
Working T°	-20°C ~ +45°C
Warranty	5 years

FINISH

Standard White, Black or Silver

ON REQUEST

Dimming Option Triac, Dali, 1-10V
Ask technical departement for more information

COLOR TEMPERATURE & LUMINOUS FLUX

EN-DLI030-01

2'700K	3'000K	4'000K	5'000K
2x1155 lm ±5%	2x1260 lm ±5%	2x1317 lm ±5%	2x1358 lm ±5%

EN-DLI045-01

2'700K	3'000K	4'000K	5'000K
3x1155 lm ±5%	3x1260 lm ±5%	3x1317 lm ±5%	3x1358 lm ±5%


CERTIFICAT

CE RoHS

APPLICATION: Showcase, Art, Sculpture, Museums, Shelves and commercial lighting, ...



EN-DLI Family

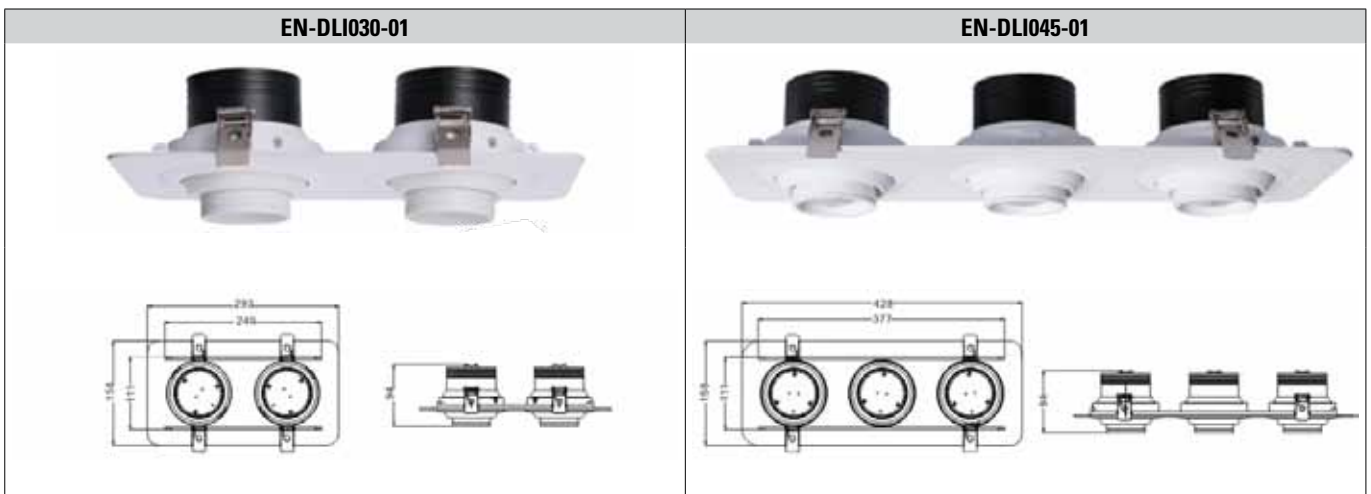

AGABEKOV