

TECHNICAL DATA SHEET

LASYTAL IP65 / Aga-Led® Type B

VERSION - 16.12.2016

STANDARD LUMINAIRE

Reference	LASYTAL
Protection Class	IP65 - Tube IP68
Lighting Source	Aga-Led® Type B
Connector	Rigid Loop on B'Light conductor 16mm ²
Dimensions	120 x 62mm
Standard Length	200 - 530 - 1025 - 1520 - 2015mm
Length on measure	on request up to 2015mm
Nb Lighting Unit	15 LED/m
Voltage	24V
Power	With B3: 14.4W/m - With B6: 18 W/m
Connecting Cable	One Side: 1m cable PUR 2x2.5mm ²

FINISH

Color Finishing Profil

Standard	Black Powder Coating
On request	Thermo-enamelling Powder Coating RAL Color Anodising

Glass Finishing

Standard	Clear
On request	Opaline

ON REQUEST

Fixation	LASY BOX
Connecting Plug	AMS / AF or AMS-E / AF-E
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

LIGHTING SOURCE

Lighting Source	Aga-Led® Type B - Generation 2	
Ref	B3	B6
Power	0.96W	1.2W
Voltage	24V	24V
Beam Angle	120°	120°
CRI	80	80
Lifetime	50'000h	
Working T°	-20°C to +45°C	

Environmental protection Modified acrylate resin


Color Temperature & Luminous Flux / Unit

	2200K	2400K	2700K	3000K	4000K
Aga-Led® B3-G2	--	97 lm	137lm	137lm	137lm
Aga-Led® B6-G2	129 lm	140 lm	166 lm	166 lm	166 lm


CERTIFICAT



APPLICATION: walls, recessed ground, passageways

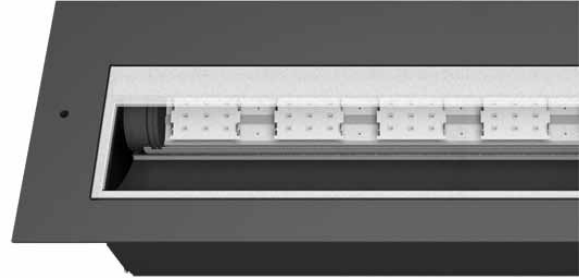


LASYTAL / Aga-Led® Type B - Rigid Loop

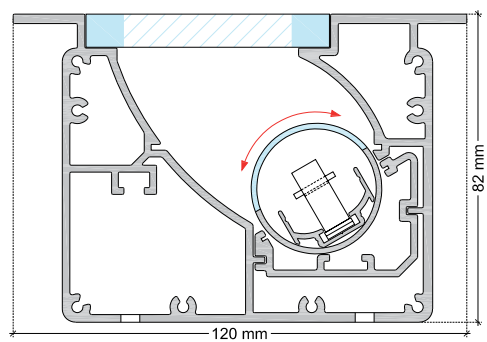


ADVISED INSTALLATION FOR UNIFORM LIGHT OUTPUT

CLEAR GLASS

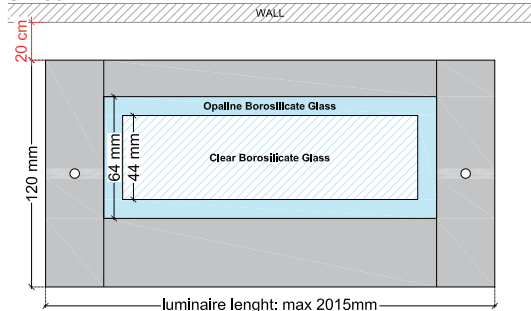

OPALINE GLASS

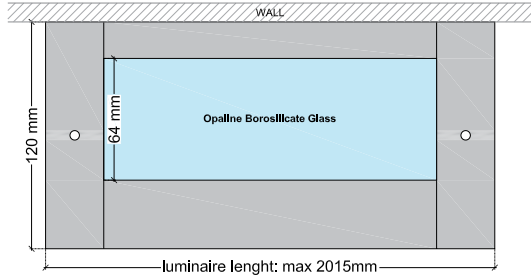

On Request: Connecting Plug

AF/AMS



AF-E/AMS-E (IP68)

