


## TECHNICAL DATA SHEET

**LFXTSM IP67 / Luminaire Sauna T° Resistance 200°C / Xenon Bulb 20'000h** VERSION - 03.05.2018


### STANDARD LUMINAIRE

Reference	LFXTSM
Protection Class	IP67 Tube High Temperature 200°C
Lighting Source	Xenon - <b>3W/5W max.</b>
Connector	Rigid Loop on B'Light conductor 16mm <sup>2</sup>
Dimensions	60 x 35mm
Standard Length	120mm - 505mm - 1000mm - 1550mm - 2045mm
Nb Lighting Unit	17 bulbs/m
Voltage	24V
Power	<b>With 3W : 51W/m</b> <b>With 5W : 85W/m</b>
Connecting Cable	One Side: 1m Cable Silicone 180° - 2x2.5mm <sup>2</sup> <i>On request: Cable length on measure</i>
Fixture	Aluminium Support - 60mm - RAL9006 <i>On request: Other width &amp; RAL</i>

### APPLICATION: SAUNA

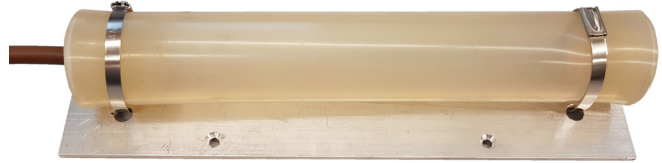

LFXTSM / Xenon **3W/5W max.**

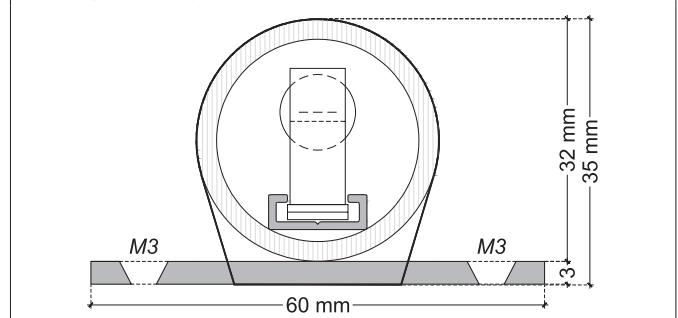

### FINISH

Fixture - Standard	Natural Anodised Aluminium
<i>On request</i>	<i>Powder Coating RAL</i>
Tube 200°C	Transparent Elastomer Silicone
	- High dielectric rigidity
	- Good resistance to chemical product
	- Excellent resistance to ozone and aging
	- Temperature resistance: -60°C ~ +200°C

### ON REQUEST

Connecting Cable	Two Sides: 1m Cable Silicone 180° - 2x2.5mm <sup>2</sup> <i>On request: Cable length on measure</i>
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

### LIGHTING SOURCE

Lighting Source	Xenon Long Life
Glass	Clear or Frosted
Power	<b>3W or 5W</b>
Voltage	24V
Beam Angle	360°
Lifetime	20'000h

### Color Temperature & Luminous Flux / Unit

<b>Power</b>	3W	5W
<b>CCT</b>	<b>2300K</b>	<b>2400K</b>
<b>Luminous Flux/Unit</b>	12.6 lm	40 lm

### CERTIFICAT

