

TECHNICAL DATA SHEET

Hanging Rod with Light / LPX-AC IP20 / Xenon

VERSION - 03.08.2016


STANDARD LUMINAIRE

Reference	LPX-AC	
Protection Class	IP20	
Lighting Source	Xenon	
Connector	Rigid Loop on B'Light conductor 16mm ²	
Dimensions	ø33mm	
Standard Length	330 - 1000 - 1670 - 2000mm	
Length on measure	on request up to 3000mm	
Nb Lighting Unit	17 bulbs/m	
Voltage	24V	
Power	3W	5W
	51 W/m	85 W/m
Connecting Cable	1m standard cable 2x2.5mm ²	
Wall Fixation	FT1	
Grid	GRPR	

APPLICATION: Wardrobes Lighting



LPX-AC / Xenon - Rigid Loop + Grid GRPR

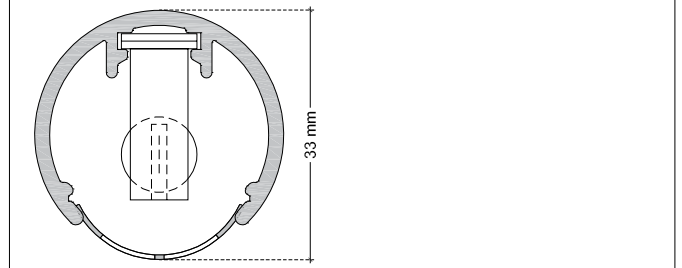

FINISH

Color Finishing Profil


Standard	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome Aspect Polished Aluminium Old Gold Aspect Plywood (See LPX-AC Wood Finish Data Sheet)

Glass Finishing

Standard	VFC: Clear Glass
On request	VFO: Opaline Glass

WALL FIXATION : FT1

Not available in plywood

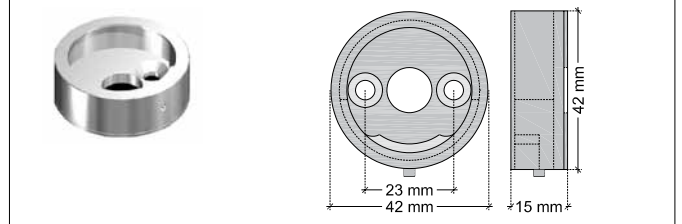

ON REQUEST

Fixation	FC: Median Support
Reflector	RIP
Connection	IDP: Door Switch
Dimming Option	Phase 220V, Dali, KNX Ask technical departement for more information


LIGHTING SOURCE

Lighting Source	Xenon Long Life	
Glass	Clear or Frosted	
Power	3W	5W
Voltage	24V	24V
Beam Angle	360°	360°
Color Temperature	2300K	2400K
Light Output lm/unit	12.6lm	40lm
Lifetime	20'000h	20'000h

On Request: MEDIAN SUPPORT : FC

Every 900mm for a safe installation

Not available in plywood

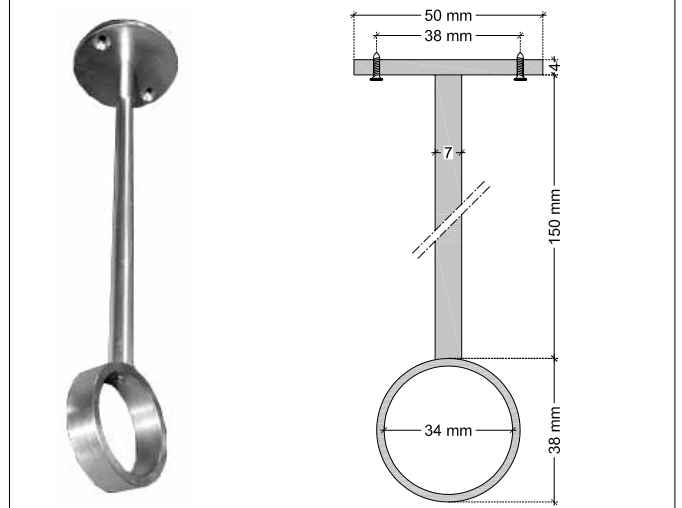

CERTIFICAT



AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
E - mail: info@aaabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
Internet: www.aaabekov.com



TECHNICAL DATA SHEET

Hanging Rod with Light / INSTALLATION

VERSION - 03.08.2016

