

TECHNICAL DATA SHEET

LU3AL IP20 / Flex Led

VERSION - 30.04.2018

STANDARD LUMINAIRE

Reference	LU3AL
Protection Class	IP20
Lighting Source	Flex Led
Dimensions	52 x 28mm
Standard Length	330 - 670 - 1000 - 1330 - 1670 - 2000mm
Length on measure	on request up to 3000mm
Nb Lighting Unit	60 LED/m
Voltage	24V
Power	4.8W/m
Connecting Cable	1m standard cable 2x1.5mm ²

FINISH

Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome Aspect Polished Aluminium Gold Aspect

ON REQUEST

Fixation	ABA: Perpendicular Support ABS: 45° upward or downward support
Cover	VAS: Clear Glass / VOS: Opaline Glass VAU: Clear Glass / VOU: Opaline Glass
End Caps	EPA EPAR (for VAS/VOS Cover)
Connecting Plug	AMS / AF
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

LIGHTING SOURCE

Lighting Source	Flex Led
Voltage	24V
Power	4.8W/m
Nb Led	60 LED/m - LED Pitch: 16.8mm
Beam Angle	120°
CRI	>80
Cut-Out	every 100mm
Lifetime	50'000h or 5 years
Working T°	-30°C to +75°C


Color Temperature & Luminous Flux / Meter

CCT	2700K	3000K	4000K
lm/m	390 lm	390 lm	425 lm

CERTIFICAT



LU3AL / Flex Led

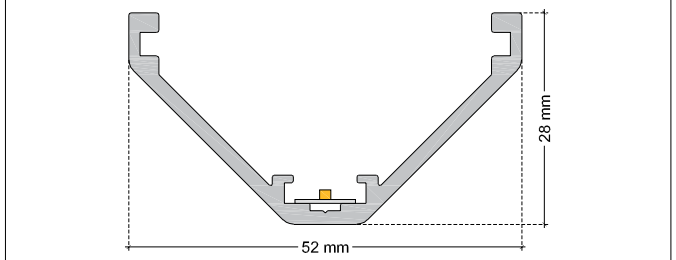

ON REQUEST: LU3AL Fixation - NOT POSSIBLE WITH COVER

ABA




ABS




ON REQUEST: LU3AL Cover

VAS/VOS

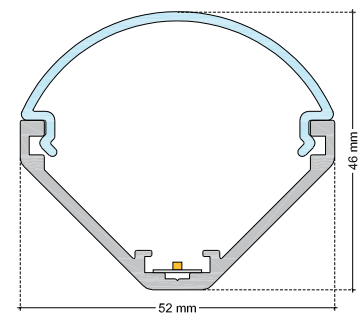

VAU/VOU

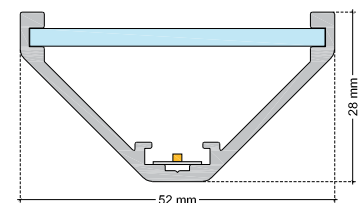

ON REQUEST: LU3AL End Caps

EPA



EPAR for VAS/VOS Cover



ON REQUEST : Connecting Plug AF/AMS

