

## TECHNICAL DATA SHEET

### PAVING STONE / Aga-Led® Type B

VERSION - 06.02.2017

#### STANDARD LUMINAIRE

|                  |   |
|------------------|---|
| Reference        | PVS - LED   |
| Protection Class | IP68  |
| Lighting Source  | Aga-Led® Type B   |
| Connector        | Rigid Loop  |
| Dimensions       | A: 80 x B: 80 x C:80mm<br>A: 100 x B:100 x C:80mm<br>A: 120 x B:120 x C:80mm<br><i>Dimensions on measure - on request</i><br><i>Dimensions sur mesure - sur demande</i><br><i>Maße auf Maßnahme - auf Anfrage</i> |
| Nb Lighting Unit | 1 LED/unit  |
| Voltage          | 24V   |
| Power            | With B3: 0.96 W/Unit<br>With B6: 1.2 W/Unit   |
| Connecting Cable | Cable PUR 2x0.75mm <sup>2</sup><br><i>Lenght to be determined</i>   |



#### FINISH

##### Color Finishing Profil

Standard Polyester resin, weather and UV resistant

#### ON REQUEST

Dimmable YES (1-10V, Dali, KNX)

*Ask technical departement for more information*

#### LIGHTING SOURCE

|                          |                                |      |
|--------------------------|--------------------------------|------|
| Lighting Source          | Aga-Led® Type B - Generation 2 |      |
| Ref                      | B3                             | B6   |
| Voltage                  | 24V                            | 24V  |
| Power                    | 0.96W                          | 1.2W |
| Beam Angle               | 120°                           | 120° |
| CRI                      | 80                             | 80   |
| Lifetime                 | 50'000h - 5 years              |      |
| Working T°               | -20°C to +45°C                 |      |
| Environmental protection | Modified acrylate resin        |      |


##### Color Temperature & Luminous Flux / Unit

|                       | 2200K  | 2400K  | 2700K  | 3000K  | 4000K  |
|-----------------------|--------|--------|--------|--------|--------|
| <b>Aga-Led® B3-G2</b> | --     | 97 lm  | 137lm  | 137lm  | 137lm  |
| <b>Aga-Led® B6-G2</b> | 129 lm | 140 lm | 166 lm | 166 lm | 166 lm |


#### CERTIFICAT



#### PVS / AGA-LED® TYPE B - Rigid Loop

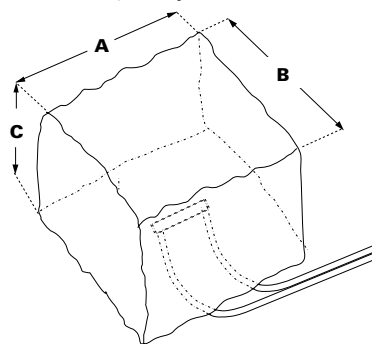

#### AGA-LED® TYPE B - IP68

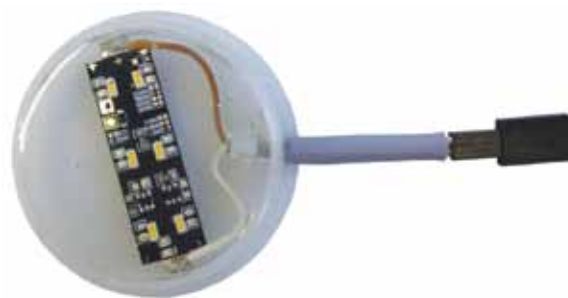

Don't hesitate to contact us for more information at:

[info@agabekov.com](mailto:info@agabekov.com)

N'hésitez pas à nous contacter pour plus d'informations :

[info@agabekov.com](mailto:info@agabekov.com)

Weitere Informationen erhalten Sie per E-Mail an

[info@agabekov.com](mailto:info@agabekov.com)

**TECHNICAL DATA SHEET**  
**PAVING STONE / Instruction of Installation**

VERSION - 26.02.2016

**1** Paving Stone IP68



**2** Heat-Shrinkable Tube



**LAYOUT OF INSTALLATION**



**AGABEKOV**



**AGABEKOV SA Manufacture** 6, ROUTE DE COMPOIS  
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND  
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08  
E - mail: info@agabekov.com




**AGABEKOV SA Bureau d'etudes** 6, ROUTE DE COMPOIS  
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND  
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08  
Internet: www.agabekov.com



## TECHNICAL DATA SHEET

### PAVING STONE / Wiring Diagram - ON/OFF System / 50 pieces max.

VERSION - 22.01.2016

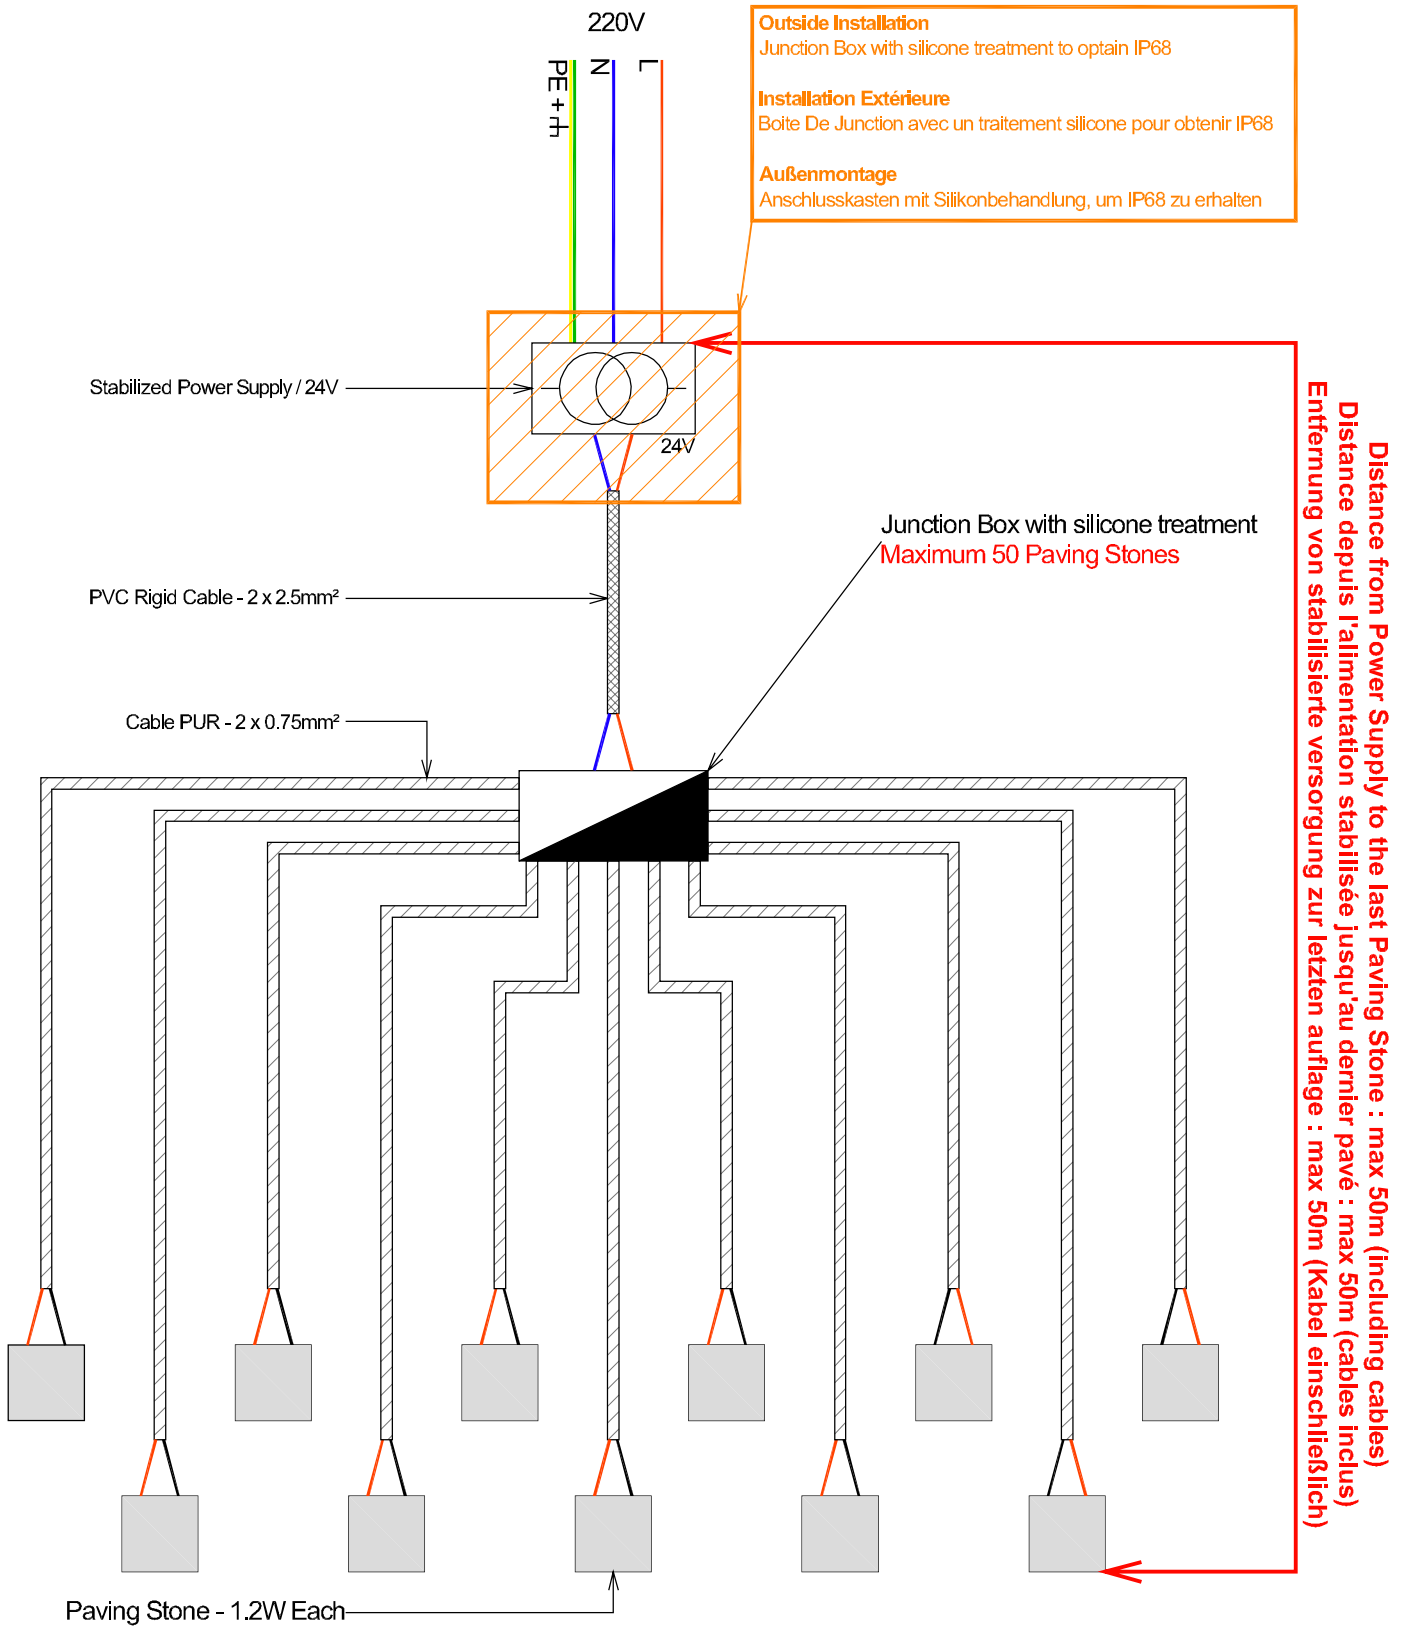

## TECHNICAL DATA SHEET

### PAVING STONE / Wiring Diagram - DALI System

VERSION - 22.01.2016

