

TECHNICAL DATA SHEET

Composed Luminaire: LU6AL-Twin / Aga-Led® Type B

VERSION - 25.06.2015


STANDARD LUMINAIRE

| | |
|--------------------|----------------------|
| Reference | LU6AL (x2) |
| Protection Class | IP20 |
| Lighting Source | Aga-Led® Type B |
| Connector | 4 Positions Clip |
| Size - mm | 105 x 59 |
| Length on measure | 210mm to 3000mm |
| Nb Lighting Source | 36 LED/m |
| Voltage | 24V |
| Power | 43.2 W/m |
| Connecting Cable | 220V |
| Power Supply | Included |
| Dimmable | No |
| Cover | VSM6 (Opaline Glass) |
| End Caps | ERPS + ERPS-N |

APPLICATION : WALL AND CEILING



Assembled Luminaire : LU6AL / AGA-LED® TYPE B - 4 Positions Clip

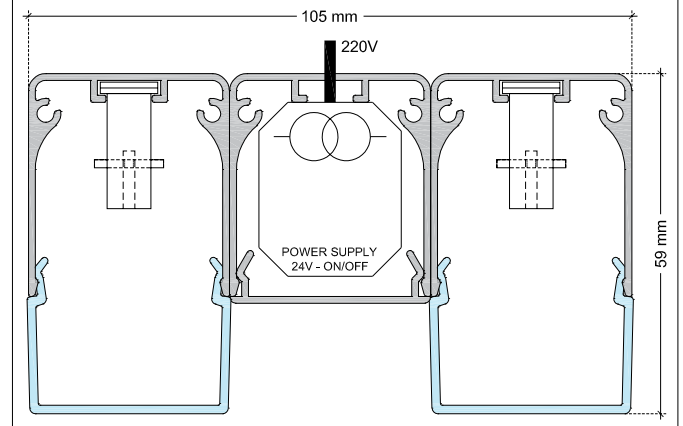

FINISH

Color Finishing Profil

| | |
|-------------------|---------------------------------|
| Standard | Natural Anodised Aluminium |
| <i>On request</i> | <i>Thermo-enameling</i> |
| | <i>Power Coating RAL</i> |
| | <i>Color Anodising</i> |
| | <i>Chromium or Gold plating</i> |

LIGHTING SOURCE

| | | | | |
|------------------------|--------------------------------|----------|----------|----------|
| Lighting Source | Aga-Led® Type B - Generation 2 | | | |
| Ref | B2 | B3 | B4 | B6 |
| Voltage | 24V | 24V | 24V | 24V |
| Power | 1.2W | 0.96W | 1.2W | 1.2W |
| Beam Angle | 120° | 120° | 120° | 120° |
| CRI | 80 | 80 | 80 | 80 |
| Light Output - lm/Unit | | | | |
| 2000K | 40 ~ 68 | 40 ~ 82 | 46 ~ 78 | 70 ~ 118 |
| 2400K | 48 ~ 81 | 58 ~ 97 | 55 ~ 93 | 83 ~ 140 |
| 2800K | 68 ~ 114 | 82 ~ 137 | 66 ~ 111 | 99 ~ 166 |
| 4000K | 68 ~ 114 | 82 ~ 137 | 66 ~ 111 | 99 ~ 166 |

Lifetime at 25° 50'000h

L70 at 25° 36'000h

Working T° -20°C ~ +40°C

Moisture resistant due to conformal silicone coated

CERTIFICAT



AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
E - mail: info@aaabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
Internet: www.aaabekov.com

