

TECHNICAL DATA SHEET

AML-T5 IP44 / Fluorescent Tube T5

VERSION - 17.03.2016


STANDARD LUMINAIRE

Reference	AML-T5
Protection Class	IP44
Lighting Source	Fluorescent Tube T5
Connector	Socket DT5
Dimensions	120 x 60mm
Standard Length	610 - 910 - 1210 - 1510mm
Nb Lighting Unit	1 Tube
Voltage	220 - 240V
Power	14W - 21W - 28W - 35W
Connecting Terminal	Ballast + SU
Reflector	RIST
Fixation	FIX
End Caps	ARL + EFA

APPLICATION: Miroirs, walls



AML-T5/ FLUORESCENT TUBE T5 - Socket DT5

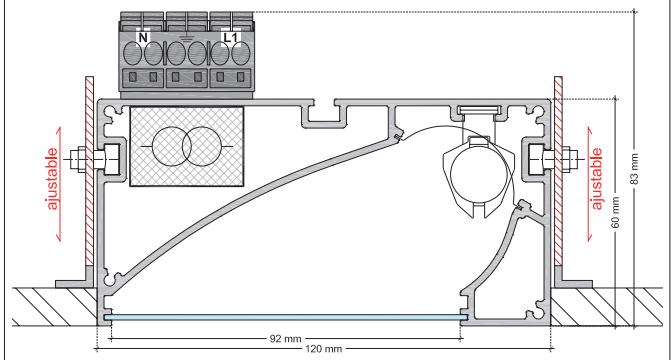

FINISH

Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome or Gold Aspect Plywood


Glass Finishing

Standard	VER: Opaline Glass
On request	VERC: Clear Glass

ON REQUEST

Dimming Option	Dali, KNX Ask technical departement for more information
----------------	---

FIXATION : FIX

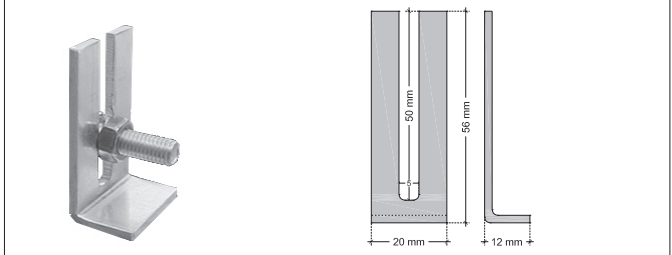

LIGHTING SOURCE

Lighting Source	Fluorescent Tube T5			
Ref	T5-549	T5-849	T5-1149	T5-1449
Voltage	220 - 240V	220 - 240V	220 - 240V	220 - 240V
Power	14W	21W	28W	35W
Beam Angle	360°	360°	360°	360°
Color Temperature	lm/Unit			
	2700K	2100 lm	2900 lm	3650 lm
	3000K	1200 lm	2100 lm	2900 lm
	4000K	1200 lm	2100 lm	2900 lm
Lifetime	48'000h			

CERTIFICAT



AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
E - mail: info@aaabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
Internet: www.aaabekov.com

