

## TECHNICAL DATA SHEET

### Hanging Rod with Light / LPAL IP20 / Aga-Led® Type B

VERSION - 03.08.2016

#### STANDARD LUMINAIRE

Reference	LPAL
Protection Class	IP20
Lighting Source	Aga-Led® Type B
Connector	Rigid Loop on B'Light conductor 16mm <sup>2</sup>
Dimensions	ø33mm
Standard Length	330 - 1000 - 1670 - 2000mm
Length on measure	on request up to 3000mm
Nb Lighting Unit	17 LED/m
Voltage	24V
Power	16.32W/m to 20.4W/m
Connecting Cable	1m standard cable 2x1.5mm <sup>2</sup>
Wall Fixation	FT1

#### FINISH

##### Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome Aspect Polished Aluminium Gold Aspect Plywood (See LPALW Data Sheet)

##### Glass Finishing

Standard	VFC: Clear Glass
On request	VFO: Opaline Glass

#### ON REQUEST

Fixation	FC: Median Support
Grid	GRPR
Connection	IDP: Door Switch
Dimming Option	1-10V, Dali, KNX Ask technical departement for more information

#### LIGHTING SOURCE

Lighting Source	Aga-Led® Type B - Generation 2			
Ref	B3	B6		
Voltage	24V	24V		
Power	0.96W	1.2W		
Beam Angle	120°	120°		
CRI	80	80		
Lifetime	50'000h			
Working T°	-20°C to +45°C			
Environmental protection	Modified acrylate resin			

##### Color Temperature & Luminous Flux / Unit

	2200K	2400K	2700K	3000K	4000K
<b>Aga-Led® B3-G2</b>	-	97 lm	137lm	137lm	137lm
<b>Aga-Led® B6-G2</b>	129 lm	140 lm	166 lm	166 lm	166 lm


#### CERTIFICAT



#### APPLICATION: Wardrobes Lighting




#### LPAL / AGA-LED® TYPE B - Rigid Loop

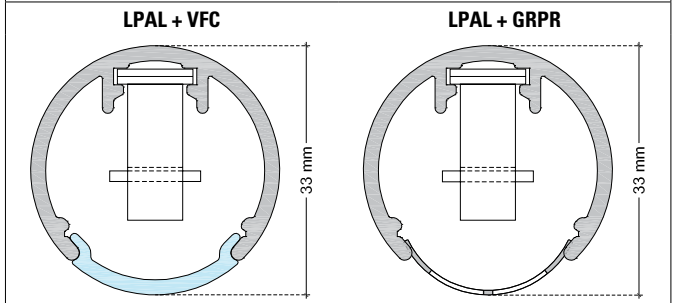


#### WALL FIXATION : FT1

Not available in plywood

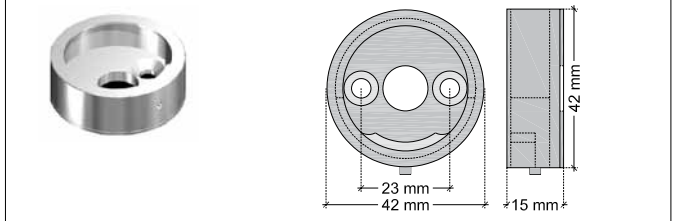

#### On Request: MEDIAN SUPPORT : FC

Every 900mm for a safe installation  
Not available in plywood

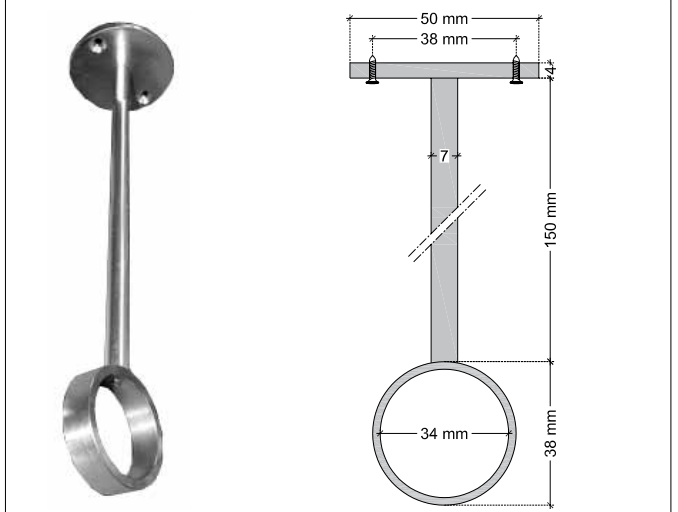

## TECHNICAL DATA SHEET

### Hanging Rod with Light / INSTALLATION

VERSION - 03.08.2016

