

TECHNICAL DATA SHEET

Hanging Rod with Light / LPALW Plywood IP20 / Flex Led

VERSION - 30.04.2018

STANDARD LUMINAIRE

Reference	LPALW
Protection Class	IP20
Lighting Source	Flex Led
Dimensions	ø34mm
Standard Length	330 - 1000 - 1670 - 2000mm
Length on measure	on request up to 3000mm
Nb Lighting Source	60 LED/m
Voltage	24V
Power	4.8 W/m
Connecting Cable	1m standard cable 2x1mm ²
Wall Fixation	FT1-W

APPLICATION: Wardrobes Lighting



FINISH

Color Finishing Profil

Standard Plywood

Glass Finishing

Standard VFC: Clear Glass


On request VFO: Opaline Glass

Wall Fixation & Median Support Finishing

Standard Natural Anodised Aluminium


On request
Thermo-Enameling
Powder Coating RAL
Color Anodising
Polished Aluminium Chrome Aspect
Polished Aluminium Old Gold Aspect

LPALW + VFC / Flex Led

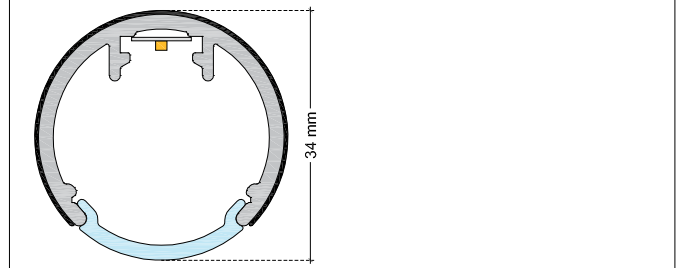

WALL FIXATION : FT1-W

Not available in plywood

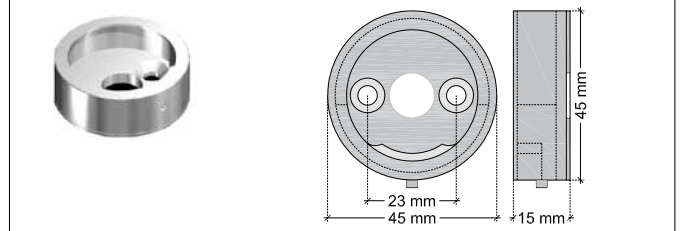

ON REQUEST

Fixation	FC-W: Median Support
Connection	IDP: Door Switch
Dimming Option	1-10V, Dali, KNX Ask technical departement for more information

LIGHTING SOURCE


Lighting Source	Flex Led
Voltage	24V
Power	4.8W/m
Nb Led	60 LED/m - LED Pitch: 16.8mm
Beam Angle	120°
CRI	>80
Cut-Out	every 100mm
Lifetime	50'000h or 5 years
Working T°	-30°C to +75°C

Color Temperature & Luminous Flux / Meter

CCT	2700K	3000K	4000K
lm/m	390 lm	390 lm	425 lm

MEDIAN SUPPORT : FC-W

Every 900mm for a safe installation
 Not available in plywood

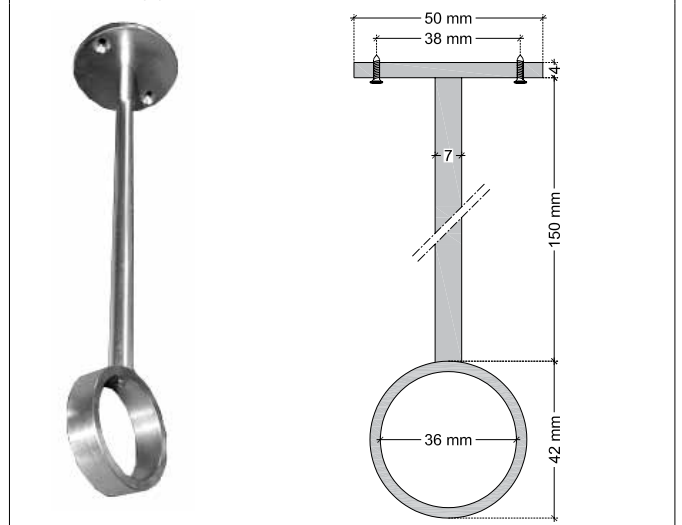

CERTIFICAT




AGABEKOV

TECHNICAL DATA SHEET

Hanging Rod with Light / INSTALLATION

VERSION - 03.08.2016

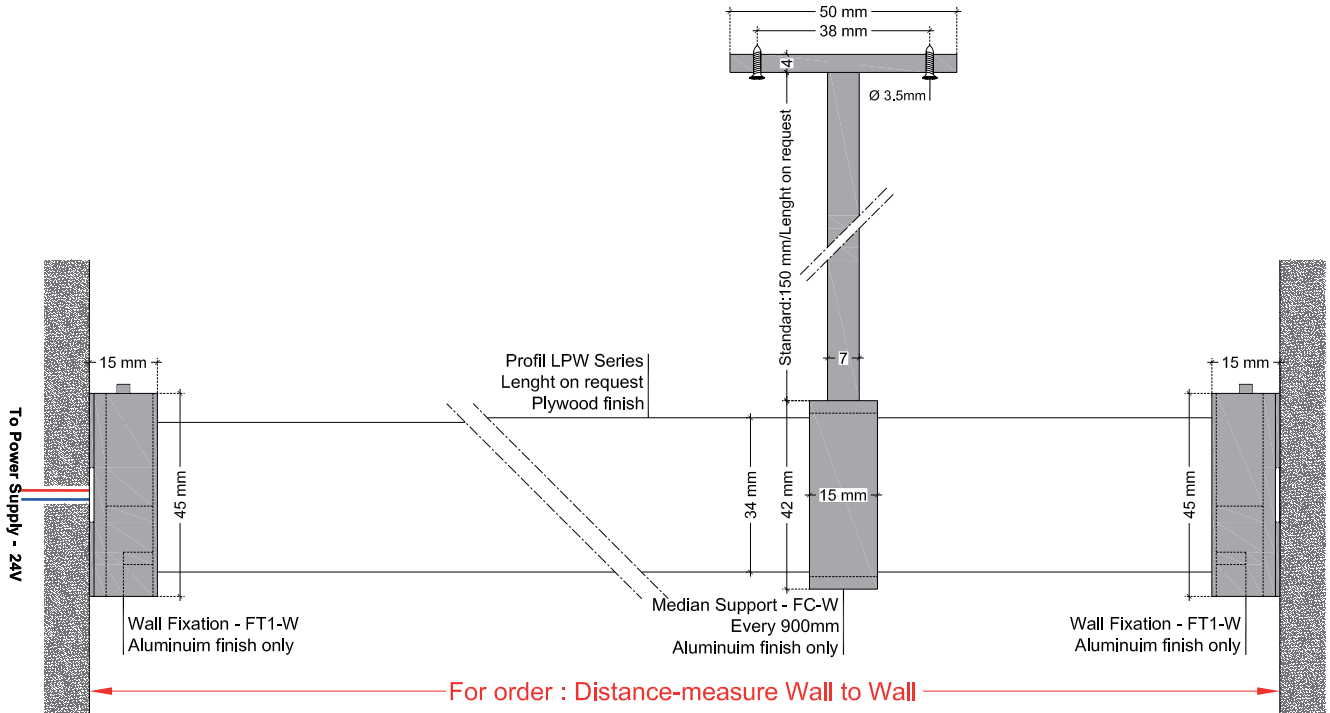

AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS
 CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
 Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
 E-mail: info@agabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS
 CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
 Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
 Internet: www.agabekov.com

