

## TECHNICAL DATA SHEET

### LT2AL IP20 / Flex Led

VERSION - 16.03.2017

#### STANDARD LUMINAIRE

Reference	LT2AL
Protection Class	IP20
Lighting Source	Flex Led
Dimensions	ø33 x 28mm
Standard Length	330 - 670 - 1000 - 1330 - 1670 - 2000 - 2330mm
Length on measure	on request up to 2990mm
Nb Lighting Unit	60 LED/m
Voltage	24V
Power	4.8W/m
Connecting Cable	1m standard cable 2x1.5mm <sup>2</sup>

#### FINISH

##### Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome Aspect Polished Aluminium Gold Aspect Plywood

#### ON REQUEST

Fixation	RBA or RBS
Cover or Grid	VFC: Clear Glass VFO: Opaline Glass GRPR (Grid not possible with Aga-Led® B3)
End Caps	EPR - EPR190
Connecting Plug	AMS / AF
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

#### LIGHTING SOURCE

Lighting Source	Flex Led
Voltage	24V
Power	4.8W/m
Nb Led	60 LED/m - LED Pitch: 16.8mm
Beam Angle	120°
CRI	>80
Cut-Out	every 100mm
Lifetime	50'000h or 5 years
Working T°	-30°C to +75°C


#### Color Temperature & Luminous Flux / Meter

<b>CCT</b>	<b>2700K</b>	<b>3000K</b>	<b>4000K</b>
<b>lm/m</b>	129 lm	140 lm	166 lm

#### CERTIFICAT



#### LT2AL - Flex Led



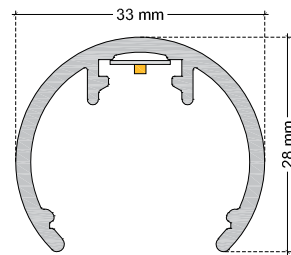


#### ON REQUEST: LT2AL COVER OR GRID

##### Cover: VFC (or VFO)




##### Grid: GRPR




#### ON REQUEST : LT2AL FIXATION

##### FIXATION RBA

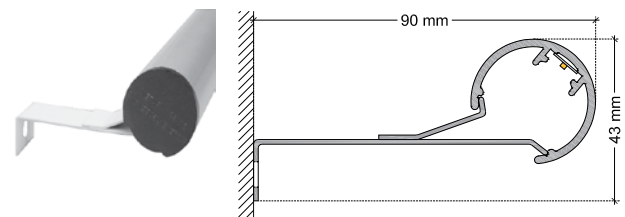

##### FIXATION RBS

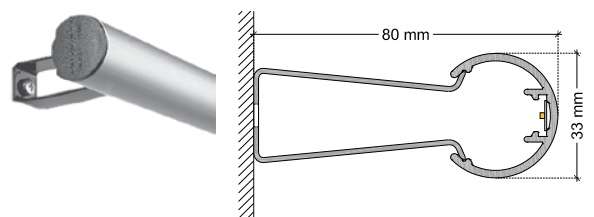

#### ON REQUEST: LT2AL END CAPS

##### EPR



##### EPR190

