

TECHNICAL DATA SHEET

LU4EAL IP65 / Aga-Led® Type B


VERSION - 06.01.2017

STANDARD LUMINAIRE

Reference	LU4EAL
Protection Class	IP65
Lighting Source	Aga-Led® Type B
Connector	Rigid Loop on B'Light conductor 16mm ²
Dimensions	37 x 37 mm
Standard Length	515 - 1010 - 1505 - 2000mm
Length on measure	on request up to 2990mm
Nb Lighting Unit	17 LED/m
Voltage	24V
Power	With B3: 16.32W/m With B6: 20.4W/m
Connecting Cable	Both side: 20cm standard cable 2x2.5mm ²
Corner Profil	PE4
End Caps	REC4



LU4EAL / AGA-LED® TYPE B - Rigid Loop



FINISH


Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-enameling Powder Coating RAL Color Anodising

Glass Finishing

Standard	VRCE: Clear Glass
On request	VRME: Opaline

ON REQUEST : Without PE4 Corner / FCU Fixture Only

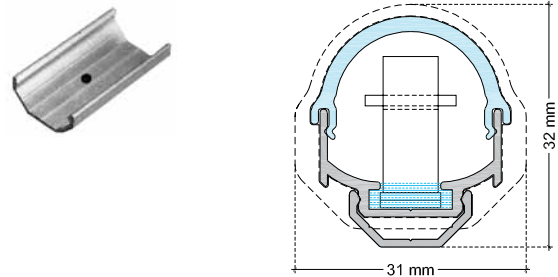

ON REQUEST

Fixation	Without PE4 Corner Profil / Only FCU Fixture
Connecting Plug	AMS / AF or AMS-E / AF-E
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

ON REQUEST: Connecting Plug

AF/AMS



AF-E/AMS-E (IP68)



LIGHTING SOURCE

Lighting Source	Aga-Led® Type B - Generation 2	
Ref	B3	B6
Power	0.96W	1.2W
Voltage	24V	24V
Beam Angle	120°	120°
CRI	80	80
Lifetime	50'000h	
Working T°	-20°C to +45°C	
Environmental protection	Modified acrylate resin	

Color Temperature & Luminous Flux / Unit

	2200K	2400K	2700K	3000K	4000K
Aga-Led® B3-G2	--	97 lm	137lm	137lm	137lm
Aga-Led® B6-G2	129 lm	140 lm	166 lm	166 lm	166 lm

CERTIFICAT



AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
E - mail: info@agabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
Internet: www.agabekov.com

