

TECHNICAL DATA SHEET

LU4TR IP68 / Aga-Led® Type RGB Generation 2


VERSION - 16.05.2017

STANDARD LUMINAIRE

Reference	LU4TR68
Protection Class	IP68 - 1meter
Lighting Source	Aga-Led® RGB Generation 2
Connector	Festoon on B'Light conductor 16mm ²
Dimensions	ø35mm
Lenght standard	135 - 520 - 1015 - 1510 - 2005 - 2665 - 2995mm
Lenght on measure	on request up to 2995mm
Nb Lighting Source	17 LED/m
Voltage	24V
Power	40.8 W/m
Connecting Cable	One Side: 1m cable Silicone 180° 4x0.75mm ²
End Caps	RECS



LU4TR68 / AGA-LED® TYPE RGB - Festoon

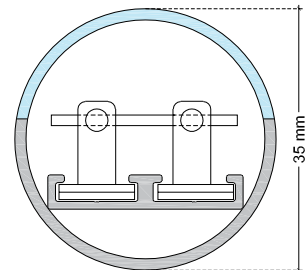

FINISH


Color Finishing Profil

Standard	Polycarbonate <i>Not suitable for swimming-pool or chlorine environment</i>
----------	--

ON REQUEST


Fixation	FL (Width:+7mm - Ht:+10mm)
Connecting Cable	Two sides: in and out cables
Connecting Plug	AMS / AF or AMS-E / AF-E
Dimming Option	Dali, KNX <i>Ask technical departement for more information</i>

ON REQUEST: LU4T68 Fixation

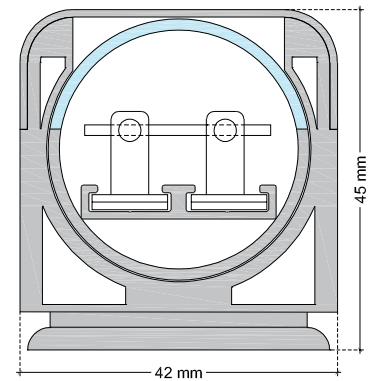

LIGHTING SOURCE

Lighting Source	Aga-Led® Type RGB
Ref	09LS05B G2
Voltage	24V
Current	Red: 20mA-Green: 40mA-Blue: 40mA
Power	2.4W
Beam Angle	120°
Light Output - mcd	Red: 750 mcd Green: 2100 mcd Blue: 450 mcd
Lifetime	50'000h
Working T°	-20°C to +45°C
Environmental protection	Modified acrylate resin

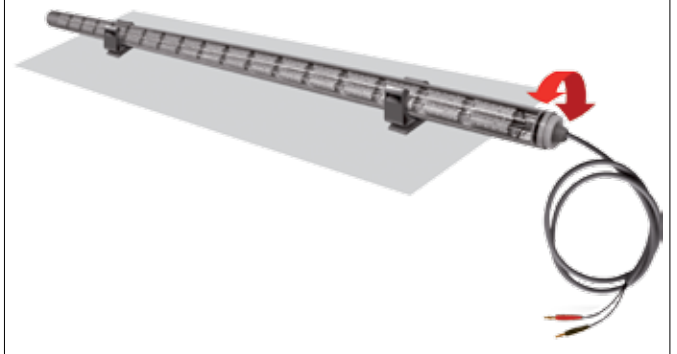

CERTIFICAT



ON REQUEST: Connecting Plug

Connecting plug AF/AMS



Connecting plug AF-E/AMS-E

