



# 70 SERIES IMP

- Small tiltable recessed downlight
- Die-cast construction
- Black inner housing detail
- Supplied with pre-wired remote non-dimming driver
- Glare control and baffle accessories
- Small cut out for halogen replacement

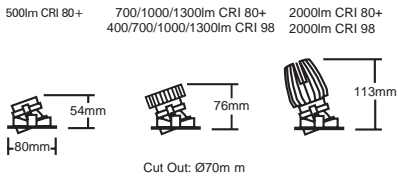

## Accessories

To order, use the following suffix

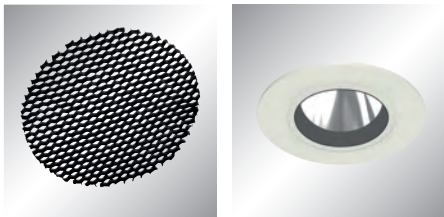

Baffle

- /HL Honeycomb louvre
- /SL Softening Lens
- /CG Clear glass
- /BF Baffle

Nickel Satin



## PRODUCT CODE

### Lumen Output:

- (05) 500 lm
- (07) 700 lm
- (10) 1000 lm
- (13) 1300 lm
- (20) 2000 lm

### Colour Temps:

- (27) 2700K
  - (30) 3000K
  - (35) 3500K
  - (40) 4000K
- (3500K available in 700 Lumens and above)*

### Colour Rendering:



- (V8) Vibrancy 80
  - (V9) Vibrancy 98
  - (80) CRI 80+
  - (98) CRI 98
- (CRI 98 / V9 up to 2000 Lumens)*

### Beam Angles:

- (M) Medium: 40°
- (W) Wide: 70°

### Colour:

- (W) White
- (N) Nickel Satin

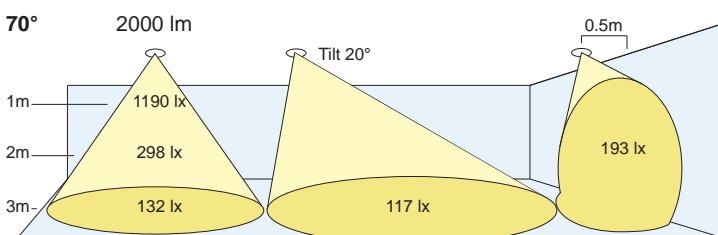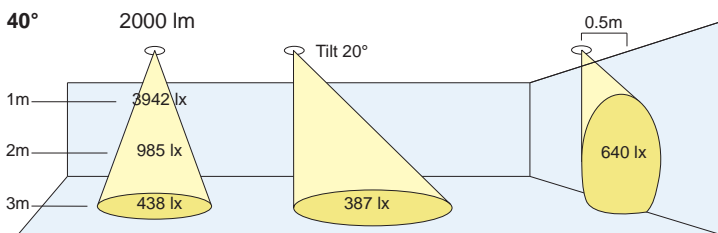

IM

/\*\*/\*\*

### Options:

#### Dimming:

- /DT Trailing Edge
- /DL Leading Edge
- /DD DALI
- /DA Analogue (1-10V)
- /LT Lumentalk
- /M3 3Hrs Maintained
- /ST Self Test
- /DE DALI Emergency

*(Other dimming options available see page 123)*