

## TECHNICAL DATA SHEET

### Ceiling & Wall Linear Lighting / LU6R / Aga-Led® Type RGB

VERSION - 02.10.2017

#### STANDARD LUMINAIRE

Reference	LU6R
Protection Class	IP40
Lighting Source	Aga-Led® Type RGB
Connector	Festoon on B'Light conductor 16mm <sup>2</sup>
Size - mm	36 x 59mm without fixture
Length on measure	210mm to 3000mm
Nb Lighting Source	18 LED/m
Voltage	24V
Power	43.2 W/m
Dimmable	Yes
Cover	VSM6 : Opaline Glass
End Caps	ERPS-N: Ryton R-4 Black
Fixture	Standard Height: 20cm - Number to be defined according to luminaire length

#### APPLICATION : WALL, CEILING OR FLOOR



#### FINISH

##### Color Finishing Profil


Standard	Natural Anodised Aluminium
On request	Thermo-enameling Power Coating RAL Color Anodising Polished Aluminium Chrome Aspect Polished Aluminium Gold Aspect

#### ON REQUEST

Fixture	Number to defined - Height on measure
End Caps	ERPS-A: Aluminium
Dimming Option	DMX, Dali, KNX <i>Ask technical departement for more information</i>

#### LIGHTING SOURCE

Lighting Source	Aga-Led® Type RGB
Ref	09LS05B G2
Voltage	24V
Current	Red: 20mA-Green: 40mA-Blue: 40mA
Power	2.4W
Beam Angle	120°
Light Output - mcd	Red: 750 mcd Green: 2100 mcd Blue: 450 mcd
Lifetime	50'000h
Working T°	-20°C to +45°C
Environmental protection	Modified acrylate resin

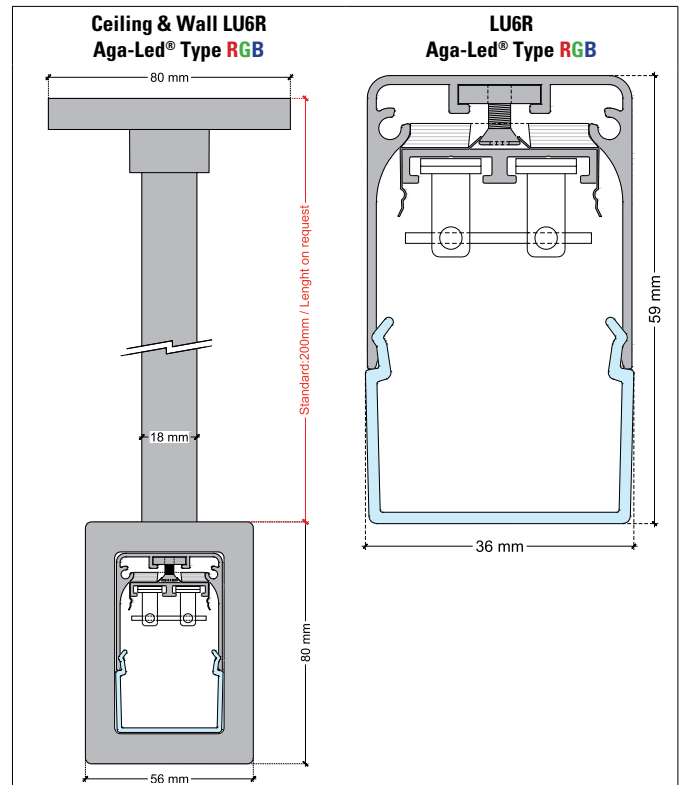

#### LU6 END CAPS

Standard: ERPS-N : Ryton R-4 Black    On Request: ERPS-A : Aluminium



#### CERTIFICAT

