

TECHNICAL DATA SHEET


Ceiling & Wall Linear Lighting / LU6SAL_Twin / Aga-Led® Type B

VERSION - 02.10.2017

STANDARD LUMINAIRE

| | |
|--------------------|--|
| Reference | LU6SAL (x2) |
| Protection Class | IP20 |
| Lighting Source | Aga-Led® Type B |
| Connector | Festoon on B'Light conductor 16mm ² |
| Size - mm | 106 x 59mm without fixture |
| Length on measure | 210mm to 3000mm |
| Nb Lighting Source | 36 LED/m |
| Voltage | 24V |
| Power | With B3: 34.56 W/m With B6: 43.2 W/m |
| Power Supply | Included - Power according to luminaire length |
| Dimmable | Yes |
| Cover | VSM6: Opaline Glass |
| End Caps | ERPS-N: Ryton R-4 Black |
| Fixture | Standard Height: 20cm - Number to be defined according to luminaire length |

APPLICATION : WALL, CEILING OR FLOOR

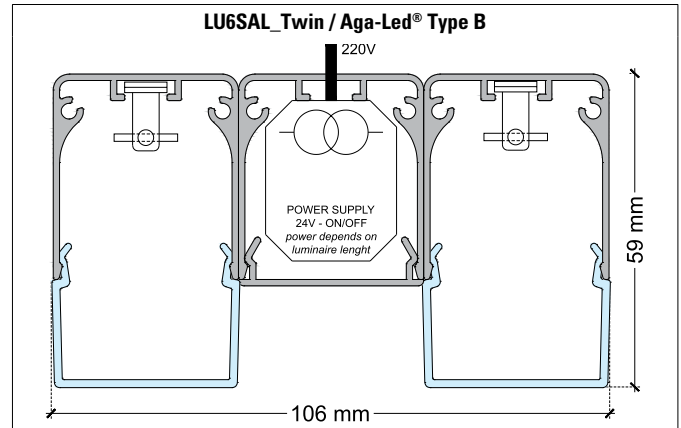

FINISH

Color Finishing Profil

| | |
|------------|--|
| Standard | Natural Anodised Aluminium |
| On request | Thermo-enameling Power Coating RAL Color Anodising Polished Aluminium Chrome Aspect Polished Aluminium Gold Aspect |

ON REQUEST

| | |
|----------------|---|
| Fixture | Number to define - Height on measure |
| End Caps | ERPS-A: Aluminium |
| Dimming Option | 1-10V, Dali, KNX <i>Ask technical departement for more information</i> |


LIGHTING SOURCE

| | | |
|-----------------|--------------------------------|------|
| Lighting Source | Aga-Led® Type B - Generation 2 | |
| Ref | B3 | B6 |
| Power | 0.96W | 1.2W |
| Voltage | 24V | 24V |
| Beam Angle | 120° | 120° |
| CRI | 80 | 80 |
| Lifetime | 50'000h | |
| Working T° | -20°C to +45°C | |
| Protection | Modified acrylate resin | |

Color Temperature & Luminous Flux / Unit

| | 2200K | 2400K | 2700K | 3000K | 4000K |
|-----------------------|--------|--------|--------|--------|--------|
| Aga-Led® B3-G2 | - | 97 lm | 137lm | 137lm | 137lm |
| Aga-Led® B6-G2 | 129 lm | 140 lm | 166 lm | 166 lm | 166 lm |

CERTIFICAT

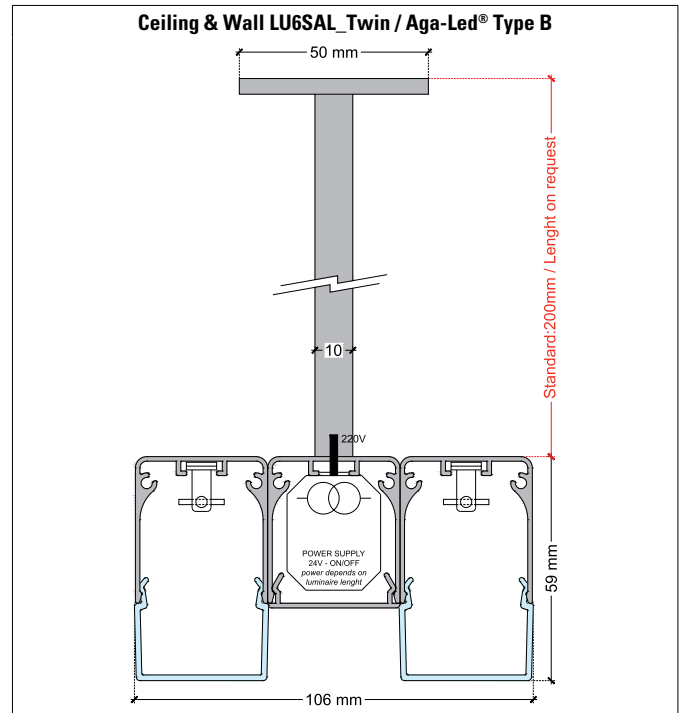

LU6 END CAPS

Standard: ERPS-N : Ryton R-4 Black **On Request:** ERPS-A : Aluminium



AGABEKOV