

TECHNICAL DATA SHEET

LU4TD68 + Cache / Aga-Led Type B

VERSION - 17.01.2017

STANDARD LUMINAIRE

Reference	LU4TD68
Fixation	FL + Cache
Protection Class	IP68
Lighting Source	Aga-Led® Type B
Connector	Festoon on B'Light conductor 16mm ²
Standard Dimensions	135 x 44 x Ht.46mm
Lenght on measure	on request up to 2995 mm
Nb Lighting Unit	2 LEDs for standard luminaire
Voltage	24V
Power	With B3: 1.92 W With B6: 2.4 W
Connecting Cable	One side: 20cm cable PUR 2x0.75mm ²

APPLICATION: FACADE - ARCHITECTURAL ORNEMENT ORIENTABLE UP-LIGHTING LUMINAIRE

Avantages:

1. Lighting facade, sculpture, architectural ornament
2. Maintenance : clip / unclip
3. Small invisible luminaire
4. IP68
5. Rotation on its horizontal axis
6. Various choices of power & kelvin



FINISH

Color Finishing Profil :

Standard Grey and Black Polycarbonate
Not suitable for swimming-pool or chlorine environment

ON REQUEST


Connecting Plug	AMSP / AFP
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

LIGHTING SOURCE

Lighting Source	Aga-Led® Type B - Generation 2	
Ref	B3	B6
Voltage	24V	24V
Power	0.96W	1.2W
Beam Angle	120°	120°
CRI	80	80
Lifetime	50'000h - 5 years	
Working T°	-20°C to +45°C	
Environmental protection	Modified acrylate resin	

Color Temperature & Luminous Flux / Unit

	2200K	2400K	2700K	3000K	4000K
Aga-Led® B3-G2	--	97 lm	137lm	137lm	137lm
Aga-Led® B6-G2	129 lm	140 lm	166 lm	166 lm	166 lm

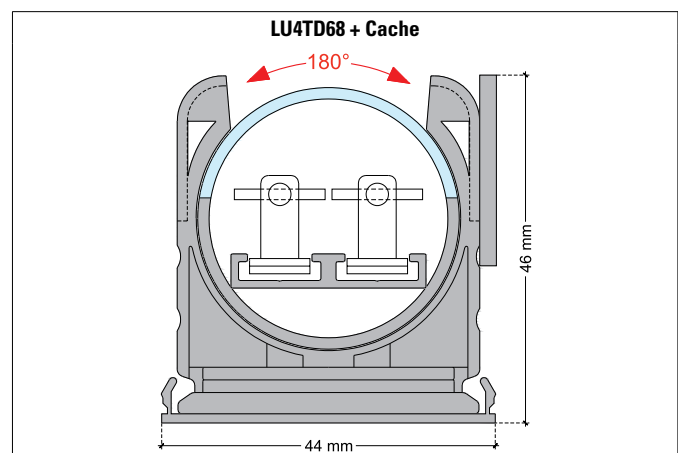

On Request: Connecting Plug AMSP/AFP



CERTIFICAT



AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
E - mail: info@aaabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
Internet: www.aaabekov.com

